


## 9. Putting into service



Remember to remove the transport block before starting up the terminal for the first time.

Transport block

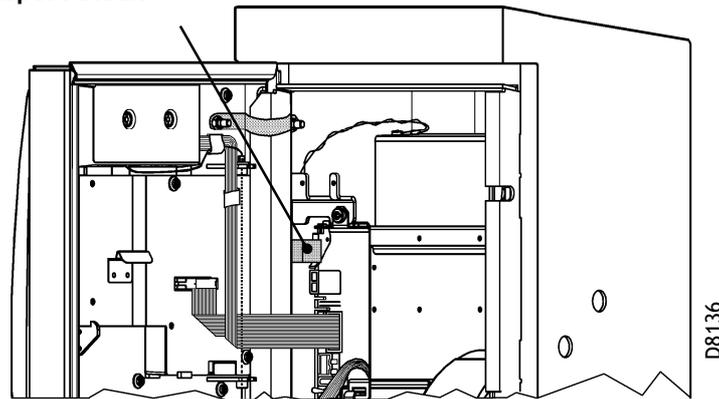


The initial starting up procedure must be made up of two stages:

- Loading the customisation,
- Then programming the electronic lock.

### 9.1 Loading the customisation

- Open the upper door of the housing.
- Put on an antistatic strap.
- Connect the loader + MMC with the main board + Neopsdata.

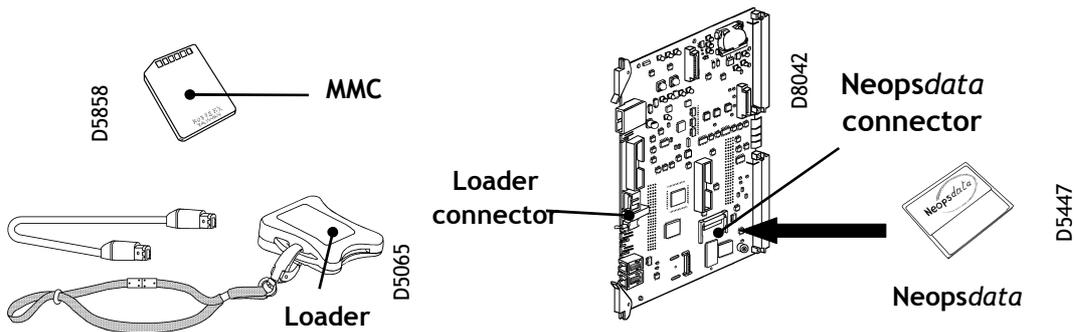

- Switch on the main board and press the (red) Cancel button on the upper door (on the outside of the terminal).



### IMPORTANT:

Do not take any flashing LEDs into consideration.

- The Pay & Display machine will display characters during the initialisation routine and then show the number of licences remaining on the MMC memory and lastly state the loading status ("Failed" or "OK").
- Once loading is successful:
  - Switch off the power to the main board;
  - Switch the power back on and print a test ticket (on-site prog. 212) and a version ticket (on-site prog. 34).
  - Use a test token to check the working of the selector.
- If the operation fails: repeat the loading procedure.



If the message "**UPDATE FAILED TAKE OFF MASTER NO MORE LICENSE**" is displayed, use an MMC with a number of licences greater than 0.

If the message "**UPDATE FAILED**" is displayed and the main board is operating correctly, use a new MMC.

---

**The Pay & Display machine is now ready for use.**

## 9.2 Programming the e-lock

- The electronic lock should be programmed with the collection door shut and with the coinbox.
- Close the collection door.
- Switch on the main board.
- Initialise with function 80.
- Wake up the terminal by pressing the (red) Cancel button and the (green) Validate button at the same time.
- Keep the Cancel button pressed in and go to the Coin collection option with the Validate button.
- Release the Cancel button to select the option.
- Place the blue programming key on the key/lock interface: message "Programming".
- When the message "Standing by for collection key" is displayed, place the black key (the collection indicator will go on at the end).



Never switch on the terminal with a **programmed** e-lock without its collection door, as the bolts might open.

Do not close the collection door with no coinbox.

Before placing a coinbox in the terminal, check if the **once-only** system on the collection door has been reset.

---

**The Pay & Display machine is now ready for use.**