



FLOWBIRD

Urban
Intelligence




COIN RETURN BOWL AND MAZE REMOVAL


- Remove the coin return bowl by unscrewing the two 7mm nuts located on the left and right hand side of the bowl.



MOUNTING THE NEW COIN UNIT


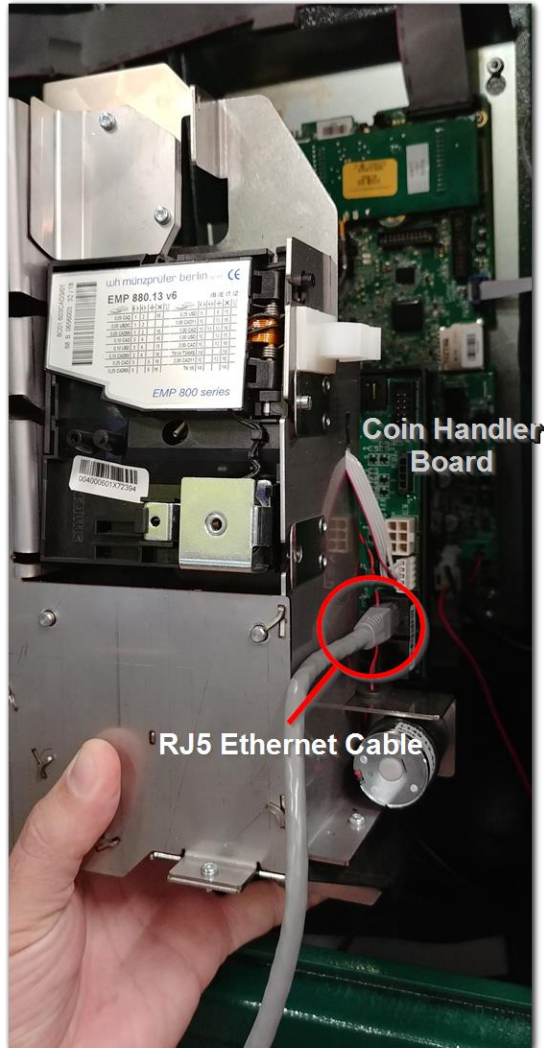


- Connect the RJ5 to the coin handler board on the coin unit.
- Next, connect the credit card reader ribbon cable to the new coin unit.

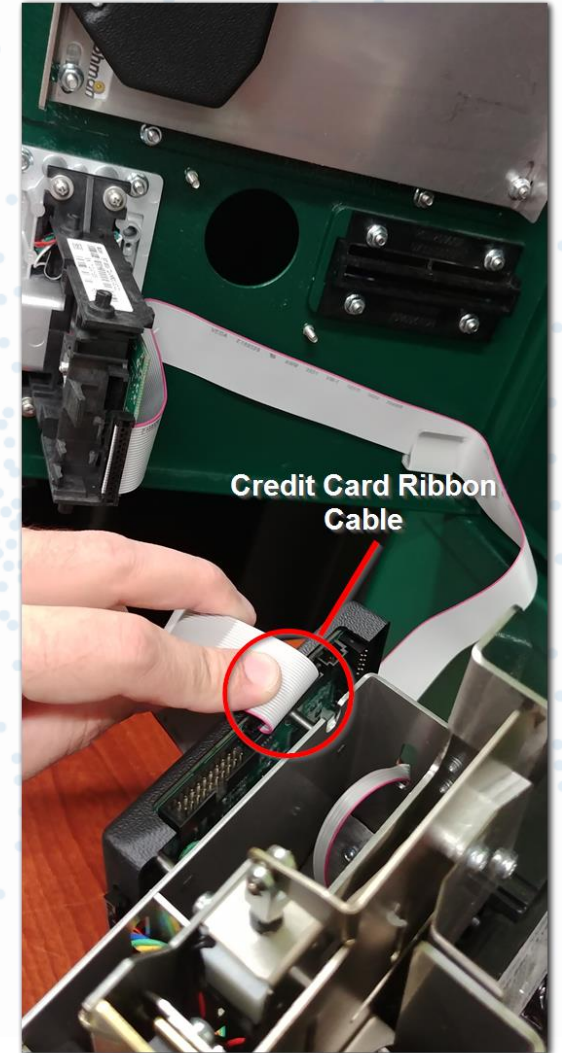


MOUNTING THE NEW COIN UNIT (CONT)

- Place the new coin unit inside of the cabinet.
- Allow the top hooks on the coin unit to slide over the bottom edge of the door opening.
- Tighten the two 7mm flanged nuts to hold the coin system in place.

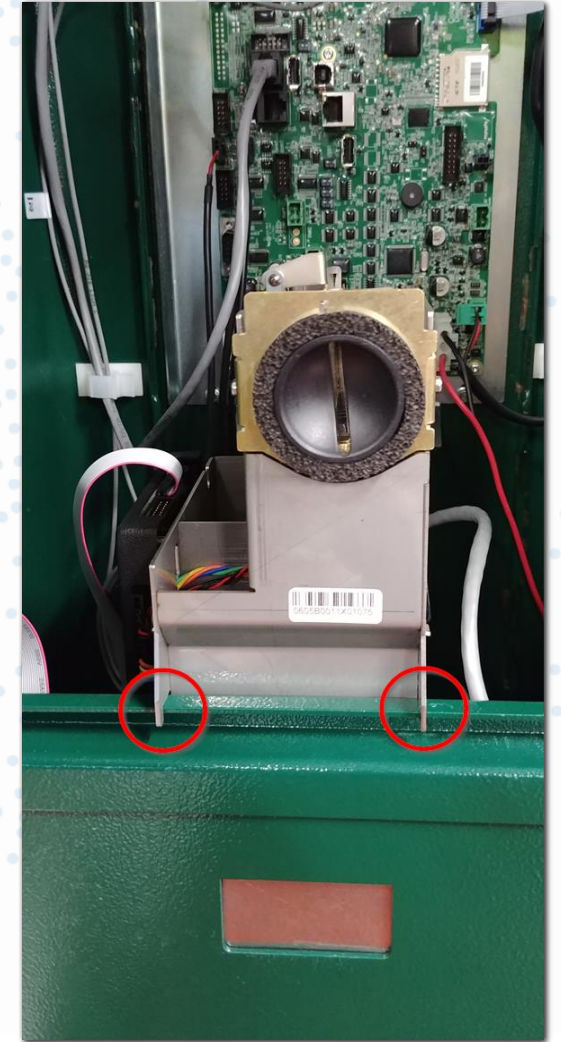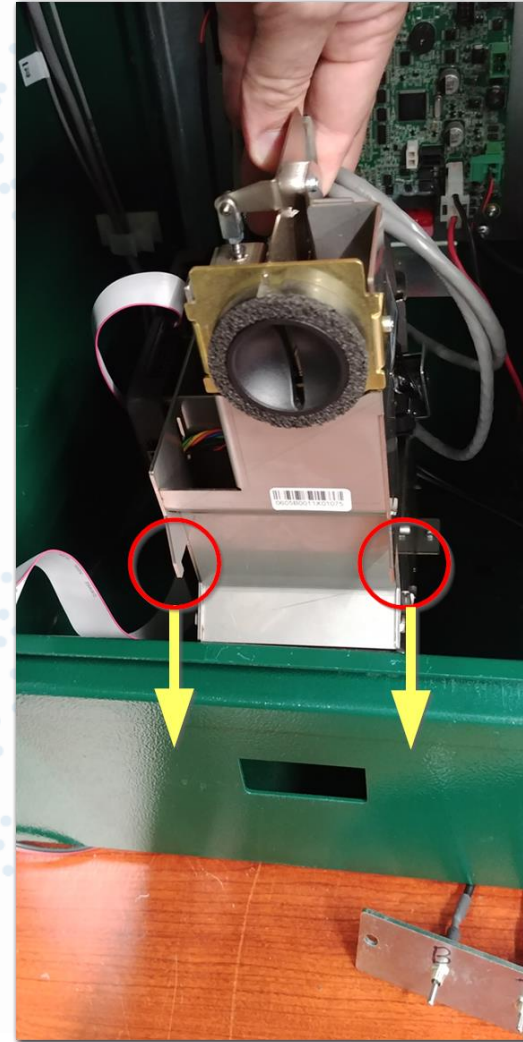

MOUNTING THE NEW COIN UNIT (CONT)

- Connect the other end of the RJ5 ethernet cable to the CWT Cap Bus (J9) port on the CPU board.

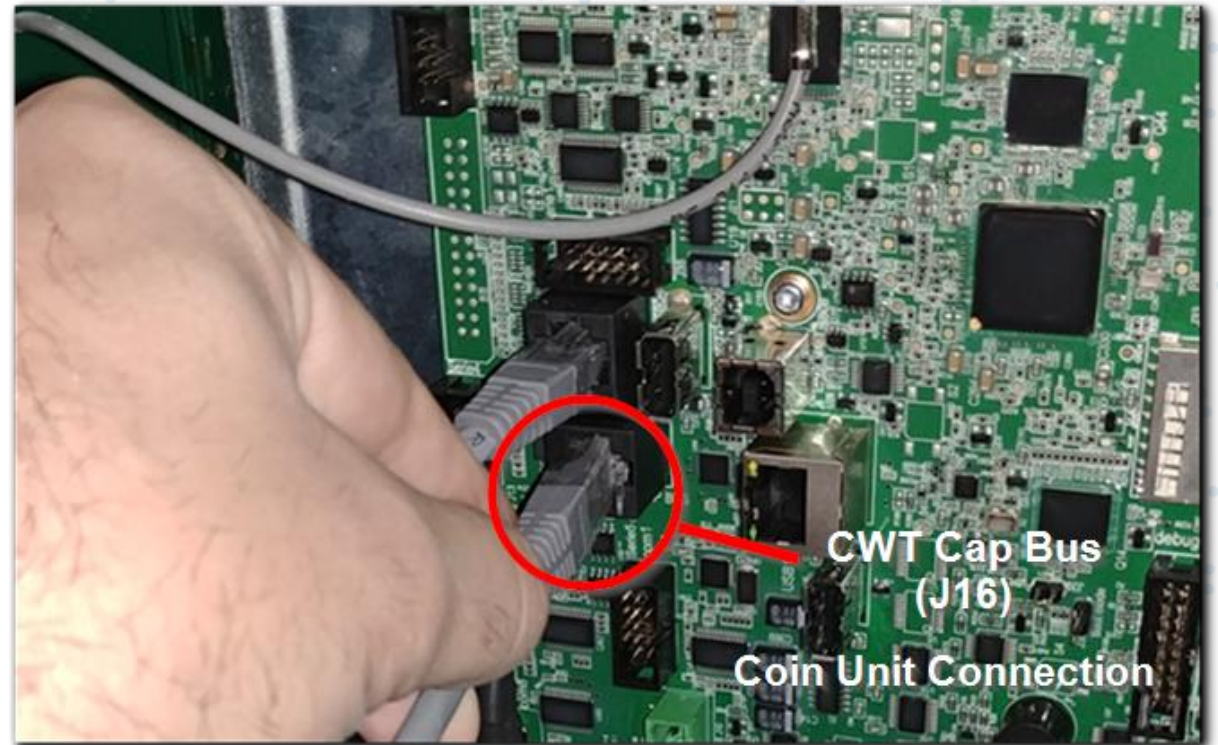

COIN BLANK OUT REMOVAL

- Remove the two 7mm flanged nuts from the coin inlet blank out.
- The two 7mm nuts are identified by the two white circles

